




# LPG Series-Gel Battery

## LPG12-85(12V85Ah)




### Specifications

Rated Voltage	12V	
Nominal Capacity	C <sub>20</sub> , 1.80V/cell	85Ah
Dimension	Length	306±2mm (12.0 inches)
	Width	168±2mm (6.61 inches)
	Container Height	208±2mm (8.19 inches)
	Total Height	214±2mm (8.43 inches)
Approx Weight	27.5kg (60.6 lbs)	
Terminal	M6	
Container Material	ABS	
Rated Capacity(25°C)	85.0 Ah	C20(4.25A, 1.80V/cell)
	80.4 Ah	C10(8.00A, 1.80V/cell)
	75.0 Ah	C5(15.0A, 1.75V/cell)
	67.2 Ah	C3(22.4A, 1.75V/cell)
	53.8 Ah	C1(53.8A, 1.60V/cell)
Max. Discharge Current	850A (5s)	
Internal Resistance(25°C)	Approx 7.4mΩ	
Operating Temp. Range	Discharge	-20 ~ 55°C (-4 ~ 131°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 50°C (5 ~ 122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Standby Use	Initial Charging Current less than 21.25A. Voltage 2.23V~2.27V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Equalization Use	Initial Charging Current less than 21.25A. Voltage 2.30V~2.37V at 25°C(77°F)Temp. Coefficient -4mV/°C	
Cycle Use	Initial Charging Current less than 21.25A. Voltage 2.40V~2.50V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LPG series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

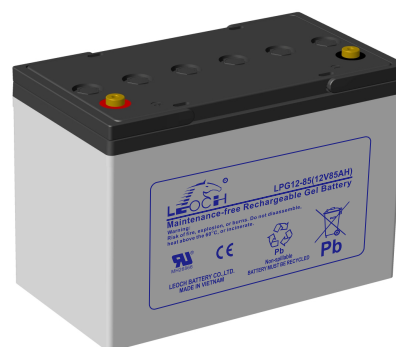

### Layout

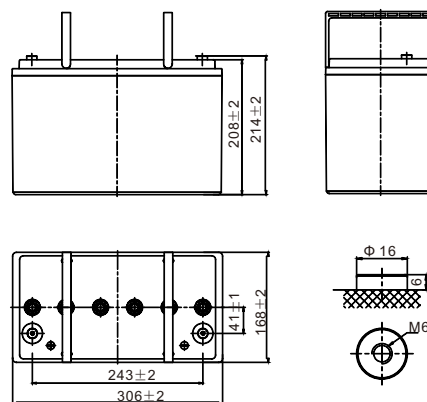

### Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	111.9	97.0	76.3	62.6	47.8	40.0	30.1	24.7	19.6	15.9	13.9	11.8	9.22	7.84	4.06
1.80V/cell	127.0	109.9	86.2	69.4	52.3	44.2	33.2	27.2	21.5	17.3	14.6	12.5	9.66	8.00	4.25
1.75V/cell	137.7	119.0	93.1	75.6	55.9	49.6	36.6	29.2	22.4	17.9	15.0	12.9	9.75	8.24	4.38
1.70V/cell	144.1	125.0	98.0	81.1	59.7	51.1	37.5	29.7	22.8	17.9	15.3	13.0	9.84	8.24	4.44
1.67V/cell	151.5	130.1	101.4	83.4	60.9	52.1	38.3	30.3	23.1	18.2	15.5	13.2	9.94	8.32	4.48
1.60V/cell	156.6	134.1	104.0	88.4	64.8	53.8	39.4	31.0	23.4	18.5	15.8	13.4	10.03	8.40	4.53

### Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	210.4	183.6	145.1	120.8	92.7	77.7	58.6	48.3	38.5	31.3	27.4	23.4	18.2	15.5	8.08
1.80V/cell	235.4	205.4	162.3	132.4	100.5	85.3	64.3	52.9	42.0	33.9	28.7	24.7	19.0	15.8	8.44
1.75V/cell	251.2	219.2	173.2	143.0	106.9	95.0	70.4	56.4	43.5	34.8	29.4	25.5	19.2	16.3	8.69
1.70V/cell	258.2	227.2	180.0	151.5	113.2	97.1	71.8	57.2	44.1	34.7	29.7	25.5	19.4	16.3	8.80
1.67V/cell	268.4	234.2	185.0	154.7	114.8	98.7	73.0	58.2	44.6	35.2	30.1	25.8	19.5	16.4	8.87
1.60V/cell	272.2	237.5	187.6	162.5	121.3	101.0	74.4	59.0	44.8	35.7	30.6	26.0	19.6	16.5	8.98



# LPG Series-Gel Battery

## LPG12-85(12V85Ah)



### Applications

- Telecommunications
- Solar system
- Wind power system
- Engine starting
- Wheelchair, Floor cleaning machines, Golf trolley, Boats


### General Features

- Battery design life up to 12 years
- Special plate design guarantees battery floating life more than 4000 times
- High thermal capacity reduce the risk of thermal out of control and drying hard, and the battery can be used in bad environment
- Little water losing, and no electrolyte stratification phenomenon


### Standards

- IEC 60896 Certified
- Classified as "Long Life" according to Eurobat
- UL ,CE Certified
- Manufactured in Leoch@ IATF16949, ISO 9001, ISO 8501 and ISO 45001 certified production facilities


### Discharge Characteristics

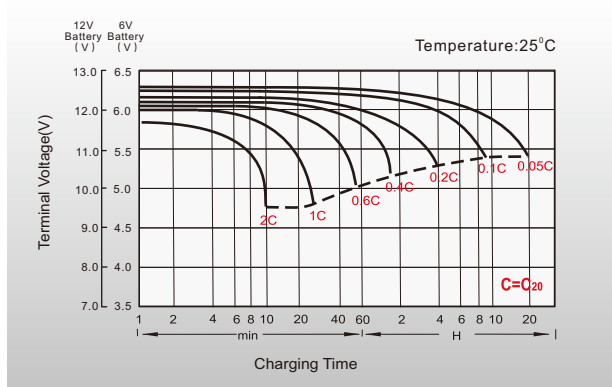


### Float Charging Characteristics

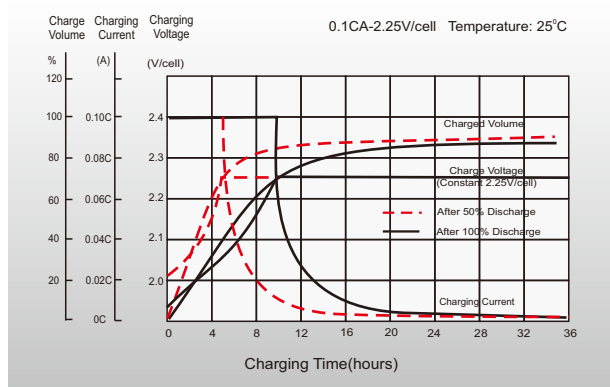

### Cycle Life in Relation to Depth of Discharge

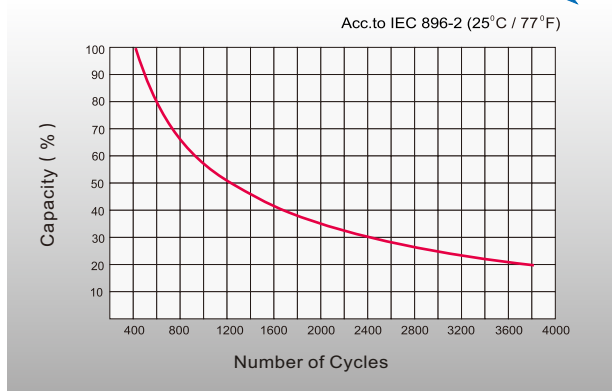

### Effect of Temperature on Long Term Float Life

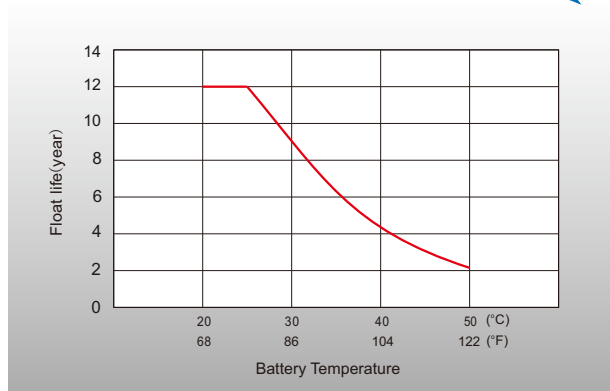

### Sales Offices Worldwide

#### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com

#### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +44 1452 69085  
E-mail: sales.hk@leoch.com

#### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Fax: +65 6863 6079  
Email: sales.sg@Leoch.com

#### Australia Sales Office

2/29 Tarlington Place, Smithfield. NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

#### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us  
Http://www.leoch.us

#### UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 69085  
E-mail: Sales.Europe@leoch.com  
Http://www.leoch.eu

#### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com  
Http://www.leoch.eu

#### India Sales Office

Shed no. A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Fax: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 1999-2021 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-LPG12-85-PD-EN-V2.0-202102